CI30XB

12” Built-In 2-Zone Induction Cooktop

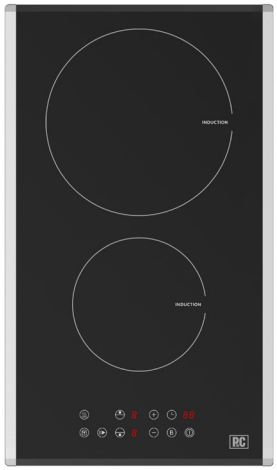

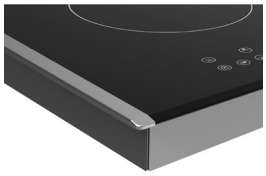

AVAILABLE FINISHES / COLOUR OPTIONS

CI30XB
Black Ceramic Glass with Metal Frame, and Beveled Edges

KEY FEATURES

Induction Cooktop
Elevate your culinary experience with P&C’s induction cooktop. Designed for superior temperature control, it allows you to create delicious dishes quickly and efficiently. Unleash your creativity and transform your cooking with induction technology. Cook with precision and ease.

Seamless Kitchen Integration
With its elegant black surface, beveled edges, and sturdy metal base frame, this induction cooktop complements any kitchen design. When off, the ceramic glass appears sleek and uniform; when powered, it features illuminated red LED controls, enhancing both functionality and aesthetics.

Touch Controls
Our intuitive touch interface enables instant, precise temperature adjustments without toggling through settings. This design ensures quick, easy, and accurate control of heat levels, enhancing your cooking experience with efficiency and precision.

Power Boost Function
Experience cooking efficiency with 9 power levels and an instant burst of heat. The Power Boost feature allows you to quickly boil large pots of water, eliminating wait times and enhancing your cooking experience. Perfect for fast-paced meal preparation.

Pause Function
Our induction cooktop features a convenient pause function that allows you to temporarily halt all cooking zones with a single button press. This ensures that your cooking process is seamlessly interrupted and can be resumed with the same settings, providing flexibility and efficiency in the kitchen.

Automatic Switch-Off
The induction cooktop is equipped with an advanced safety feature that automatically powers down the unit in the event of overheating, ensuring optimal safety and preventing potential hazards during cooking.

GENERAL PROPERTIES	
Type	12” Induction Cooktop
Style	Built-In
Surface Colour	Black Ceramic Glass
Frame Colour	Metal Aluminum Frame (left & right sides)
Beveled Edge	Beveled Edges (front & rear)
CONTROLS FEATURES	
Cooktop Control Type	Touch Controls
Control Location	Front / Center
FEATURES	
Number of Zones	2 Cooking Zones
Lighted Icons	Red - LED Light
Bridge Cooking Element	N/A
Power Stage Setting	0-9 Power Levels
Power Boost Control	Yes
Timer Control	00 - 99 minutes
Keep Warm Control	Yes
Residual Heat Indicator	Yes
Pause Function	Yes
Automatic Safety Shut Off	Yes
Child Lock	Yes
ELEMENT PERFORMANCE	
Zone / Power Boost Watts - Front	1200 W / 1500 W Power Boost
Zone / Power Boost Watts - Rear	2000 W / 2600 W Power Boost
ELEMENT SIZE	
Dimensions of Front Element	6" (152mm)
Dimensions of Rear Element	8 1/2" (216mm)
TECHNICAL DETAILS	
Wattages (W)	3600 W
Amperage (AMP)	20 AMP
Power Range / Rated Voltage	AC 208V - 60Hz - 3.1kW / AC 240V - 60Hz - 3.6kW
Power Cord Length	*Supplied with a 4.25ft electrical cable and must be hardwired
PRODUCT DIMENSIONS	
Width (In/mm)	11 13/16" (300mm)
Height (In/mm)	3 1/4" (83mm)
Depth (In/mm)	20 1/2" (520mm)
CUT OUT DIMENSIONS	
Width (In/mm)	10 5/8" (270mm)
Height (In/mm)	min. 4 3/4" (121mm)
Depth (In/mm)	19 5/16" (490mm)

Notes: Porter & Charles reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Warranties: Please see the Use & Care manual or Porter & Charles website for a statement of limited warranty. For more information on our entire line of products, go to www.porterandcharles.ca or call 905.829.3980 © Porter & Charles. All rights reserved.

CI30XB

Installation Details

PRODUCT DIMENSIONS	
In (W / H / D)	11 13/16" / 3 1/4" / 20 1/2"
mm (W / H / D)	300mm / 83mm / 520mm

CUT-OUT DIMENSIONS	
In (W / H / D)	10 5/8" / min. 4 3/4" / 19 5/16"
mm (W / D)	270mm / min. 121mm / 490mm

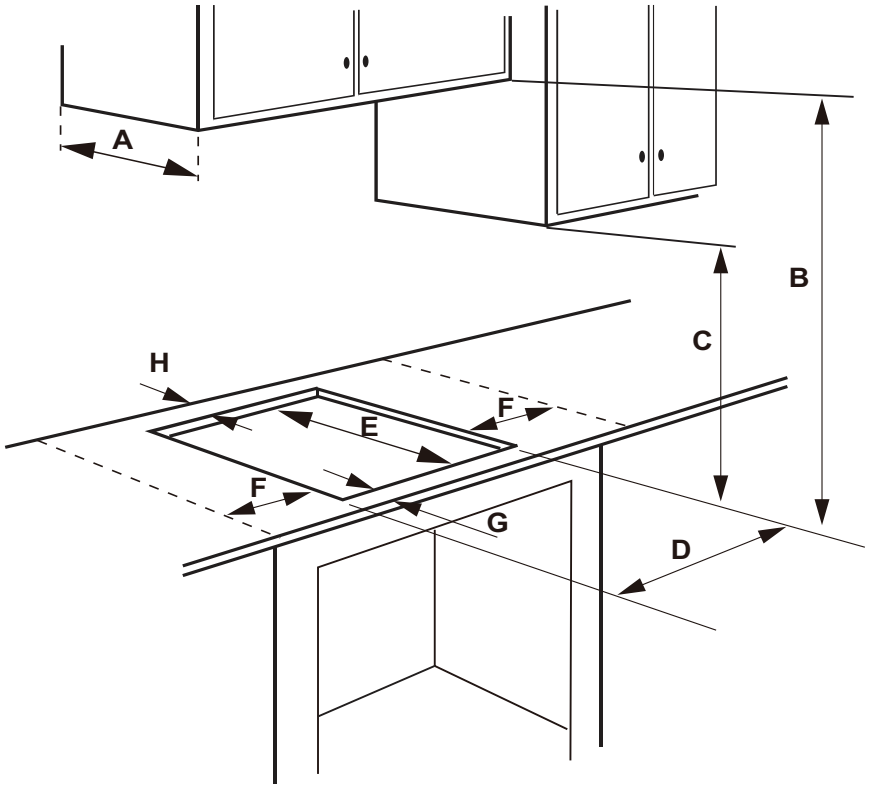

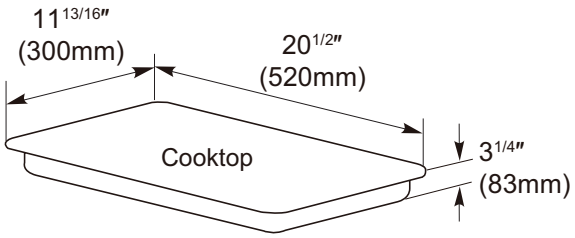

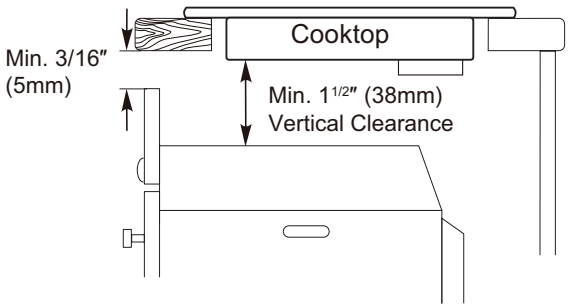

A	MAX. Depth of unprotected overhead cabinets.	13" (330mm)
B	MIN. Clearance from countertop to unprotected overhead surface.	24" (610mm) - 30" (762mm)
C	MIN. Height from countertop to nearest cabinet on either side of unit.	18" (458mm)
D	Width of Cutout.	10 5/8" (270mm)
E	Depth of Cutout.	19 5/16" (490mm)
F	MIN. Clearance from cutout to left or right side of walls.	1 3/4" (44mm)
G	MIN. From front edge of cutout and front edge of cooktop.	2 3/4" (70mm)
H	MIN. Between cutout and the wall behind the cooktop.	2" (50mm)

INSTALLATION INSTRUCTIONS FOR BUILT-IN OVEN

- Ensure a minimum clearance of 20 mm (13/16") between the bottom of the cooktop and the oven. This space is essential to facilitate proper airflow.
- There must be a minimum gap of 5 mm (3/16") between the countertop and the door panel of the built-in oven or drawer. This clearance is crucial for optimal operation.
- Please be aware that inadequate airflow can significantly reduce the lifespan of the appliance.

Refer to user manual/installation instructions for further details

Notes: Porter & Charles reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Warranties: Please see the Use & Care manual or Porter & Charles website for a statement of limited warranty. For more information on our entire line of products, go to www.porterandcharles.ca or call 905.829.3980 © Porter & Charles. All rights reserved.

WARRANTY INFORMATION

Porter & Charles Appliances are designed and manufactured to the highest standards. Each appliance is covered by a comprehensive 2-year parts and labour warranty. Refer to product warranty policy for complete terms and conditions.

FOR PARTS & SERVICE

Euro-Parts & Service
39822 Belgrave Road, Belgrave, ON. N0G 1E0 1 -866 722-2262
www.euro-parts.ca • parts@euro-parts.ca • service@euro-parts.ca

Porter & Charles appliances are imported and distributed in North America by Euro-Line Appliances Inc. For more information, please visit one of our showrooms or www.ela.ca

EURO-LINE APPLIANCES INC.

871 Cranberry Court, Oakville, ON
L6L 6J7 Canada
905.829.3980
1-800.421.6332
info@ela.ca

EURO-LINE APPLIANCES INC.

101-1014 Homer Street, Vancouver, BC
V6B 2W9, Canada
604.235.3980
1-855.ELA.WEST (352.9378)
infowest@ela.ca